

**MAX-SERIES™**  
**RT-135**

**UNLEASH A  
STAMPEDE OF  
POWER.**



Introducing the MAX-Series™ RT-135 Posi-Track® loader. Featuring an industry-leading 132hp engine, our most powerful compact track loader delivers more power without compromise while offering a premium operator experience. With a mission to help you tackle the biggest, toughest jobs, the RT-135's advanced, controls make it easy to deliver big on your next big job.

// INCREDIBLE PERFORMANCE / SUPERIOR POWER / OUTSTANDING RELIABILITY

**asv**

# RT-135 COMPACT TRACK LOADER

## OPERATING SPECIFICATIONS


|                                                |                        |
|------------------------------------------------|------------------------|
| LOADER ARMS                                    | Radial                 |
| OPERATING WEIGHT                               | 11,265 lbs ( 5110 kg ) |
| SHIPPING WEIGHT                                | 10,391 lbs ( 4713 kg ) |
| GROUND PRESSURE AT OPERATING WEIGHT            | 4.4 psi ( 30.3 kPa )   |
| RATED OPERATING CAPACITY (35% of tipping load) | 3,535 lbs ( 1603 kg )  |
| OPERATING CAPACITY (50% of tipping load)       | 5,050 lbs ( 2291 kg )  |
| TIPPING LOAD                                   | 10,100 lbs ( 4581 kg ) |
| TRAVEL SPEED, MAXIMUM - 1ST SPEED              | 6 mph ( 9.7 kph )      |
| TRAVEL SPEED, MAXIMUM - 2ND SPEED              | 10 mph ( 16 kph )      |

## ENGINE

|                                |                                                                                                         |
|--------------------------------|---------------------------------------------------------------------------------------------------------|
| TYPE                           | Diesel, 4-cylinder, turbocharged                                                                        |
| MODEL                          | Cummins QSF3.8                                                                                          |
| GROSS POWER RATING AT 2500 RPM | 132 hp ( 98.4 kW )                                                                                      |
| TORQUE, PEAK                   | 360 ft-lb ( 488 Nm )                                                                                    |
| COOLING SYSTEM                 | Temperature-controlled, variable speed hydraulically-driven fan and coolant/anti-freeze-filled radiator |
| INTAKE AIR CLEANER             | Three-stage                                                                                             |
| EMISSION CONTROLS              | Meets all U.S. EPA Tier 4 final standards                                                               |
| STANDARD FEATURE               | Auto idle                                                                                               |

## UNDERCARRIAGE

|                                                                                                                         |                                                                                          |
|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| TRACK TYPE: General purpose track constructed of rubber compound with embedded co-polymer cords and all-purpose treads. |                                                                                          |
| TRACK WIDTH                                                                                                             | 18 in. ( 457 mm )                                                                        |
| LENGTH OF TRACK ON GROUND                                                                                               | 71 in. ( 1,803 mm )                                                                      |
| GROUND CONTACT AREA                                                                                                     | 2,556 in. <sup>2</sup> ( 1.65 m <sup>2</sup> )                                           |
| DRIVE SYSTEM                                                                                                            | Two hydrostatic direct drive sprockets controlled by a single joystick                   |
| TRACK DRIVE SPROCKET                                                                                                    | Elevated with low friction, replaceable sprocket rollers                                 |
| UNDERCARRIAGE SUSPENSION                                                                                                | Two independent torsion axles per undercarriage                                          |
| ROLLER WHEELS                                                                                                           | 24 high-density polyurethane and rubber wheels per track. Wheels include sealed bearings |
| ROLLER WHEEL DIAMETER                                                                                                   | Front & rear wheels: 15 in. ( 381 mm )<br>Middle wheels: 10 in. ( 254 mm )               |

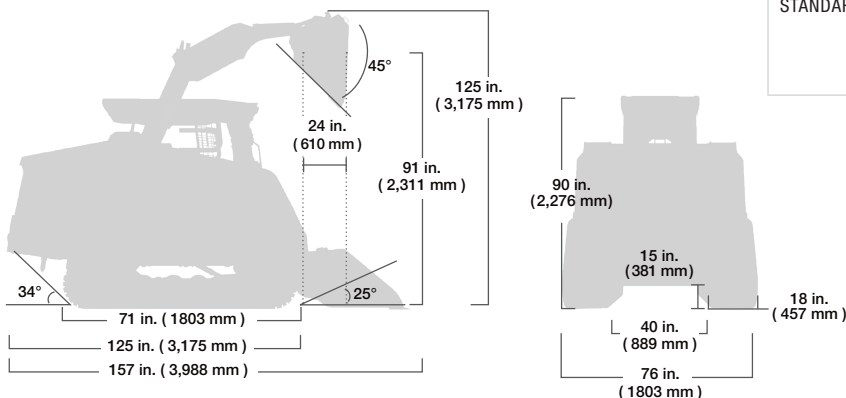

## AUXILIARY HYDRAULIC SYSTEM

|                       |                                                                                                                                                           |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| PUMP CAPACITY         | Low - variable from 0-20 gpm ( 0-75.7 lpm )<br>High - variable from 30-50 gpm ( 114-189 lpm )                                                             |
| SYSTEM PRESSURE, MAX. | Low - 3,300 psi ( 22,750 kPa )<br>High - 4,060 psi ( 27,993 kPa )                                                                                         |
| CONTROLS              | Intermittent via joystick button or continuous via console switch. High-flow is adjustable and loader/auxiliary sharing is adjustable via machine display |
| COUPLERS              | Push-to-connect quick couplers mounted on loader arms. Pressure relief valve on coupler block                                                             |
| COOLING SYSTEM        | High efficiency side-by-side radiator and oil cooler                                                                                                      |

## ELECTRICAL SYSTEM

|                   |                                                 |
|-------------------|-------------------------------------------------|
| NOMINAL CHARGE    | 12 V                                            |
| BATTERY           | 950 CCA                                         |
| CHARGING SYSTEM   | 120 amp alternator                              |
| OUTLETS           | 1-12 V port inside operator station             |
| WIRING            | Pre-wired for all factory-available accessories |
| STANDARD FEATURES | Attachment control kit, block heater            |

## OPERATOR STATION

|                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEAT: Adjustable contour vinyl mechanical seat with built-in operator presence switch, lap bar and 2 in. ( 51 mm ) wide seat belt, operator manual pouch                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                    |
| LOADER CONTROL: Right-hand pilot electronic joystick controls loader lift, lower and tilt, plus intermittent control of auxiliary hydraulic. Loader speed is adjustable and selectable from ISO or H control pattern                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                    |
| DRIVE CONTROL: Left-hand pilot electronic joystick controls machine speed and direction. Track speed is adjustable, includes a Creep Mode and is selectable from ISO or H control pattern                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                    |
| ENGINE SPEED                                                                                                                                                                                                                                                                                                                                                       | Hand-operated foot throttle and foot throttle                                                                                                                                                                                                                                                                                                                      |
| MACHINE DISPLAY: Engine RPM, engine oil pressure, hydraulic oil high temperature, engine coolant temperature, battery voltage, hourmeter, fuel level, trip meter, engine diagnostics, system monitoring, fault logging 7 inch color touch screen, integrated rear view camera, password protection with user profiles, job clock, maintenance schedules, DEF level |                                                                                                                                                                                                                                                                                                                                                                    |
| ROPS                                                                                                                                                                                                                                                                                                                                                               | ROPS: ISO 3471<br>Restraint-ISO 6683, SAE J2292, Cal OSHA 1596                                                                                                                                                                                                                                                                                                     |
| FOPS                                                                                                                                                                                                                                                                                                                                                               | ISO 3449 Level 1 (level 2 optional)                                                                                                                                                                                                                                                                                                                                |
| ILLUMINATION                                                                                                                                                                                                                                                                                                                                                       | 2 - Adjustable forward-facing LED lights<br>2 - Adjustable rear-facing LED lights<br>1 - Interior light<br>2 - LED side lights                                                                                                                                                                                                                                     |
| CONVENIENCE                                                                                                                                                                                                                                                                                                                                                        | 12 V power port                                                                                                                                                                                                                                                                                                                                                    |
| STANDARD FEATURES                                                                                                                                                                                                                                                                                                                                                  | Horn, backup alarm, cup holder, phone holder, behind seat storage, rear view mirror, lapbar, roof escape hatch, roof panel & rear cab windows. Adjustable joystick & arm rest positions, adjustable directional & air flow HVAC vents, radio with bluetooth & USB, frameless front door, attachment control kit, wiper/washer, beacon switch/outlet, easy-off door |